

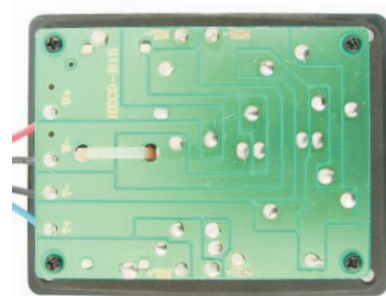
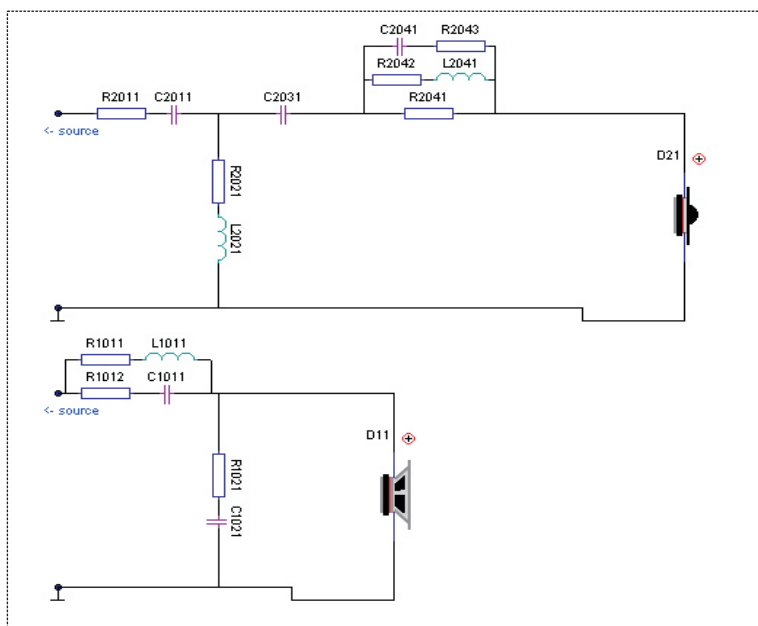


Terminal + Weiche Heco "B15" K38

BlueSound24.com
BING20110924.COM

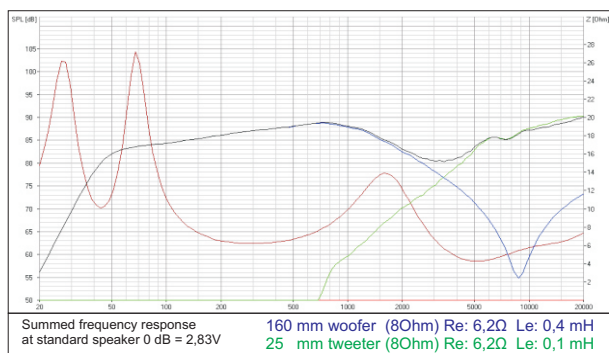


R1011	0.300 ohm	R2011	3.00 ohm	R2041	4.70 ohm
R1012	10.0 ohm	C2011	8.200 uF	R2042	0.500 ohm
C1011	0.330 uF	R2021	0.270 ohm	R2043	0.001 ohm
L1011	1.000 mH	L2021	0.100 mH	C2041	3.300 uF
R1021	5.00 ohm	C2031	12.00 uF	L2041	0.500 mH
C1021	12.00 uF				

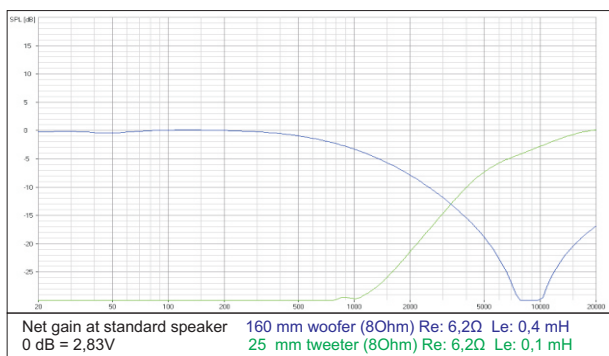

2 Wege Frequenzweiche 2X8/8 Ohm

TMT : 12 dB/Okt
HT : 18 dB/Okt
HT_{gain} : -4 dB
F_t : 3200 Hz
P_{max} : 120 W

Frontbuffer



Anschluss (Kabelkennzeichnung)

Eingang + : Terminal
Eingang - : Terminal
Tiefmitteltöner + : Rot
Tiefmitteltöner - : Schwarz
Hochtöner + : Blau
Hochtöner - : Schwarz